

**Temperature probe
NTC**
for Class 100 portable instruments

■ **NTC probes**

■ **General use** **Measuring range** **t₆₃** **Ref.**

NTC (IEC 751 guideline).
Stainless steel sheath.
ABS handle (from -40 to +85°C).

from -40 to +120°C

12
sec.


SNG 150



Secured mini-DIN connector.



Retractable cable lg. 450 mm, up to 2,4 m.

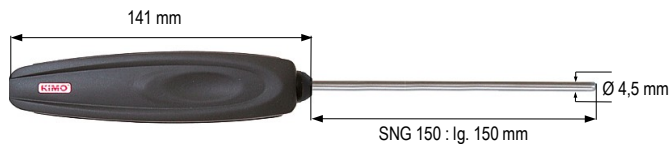

■ **Ambient** **Measuring range** **t₆₃** **Ref.**

NTC (IEC 751 guideline).
Stainless steel sheath with ambient end.
ABS handle (from -40 to +85°C).

from -40 to +120°C

10
sec.


SNA 150



Secured mini-DIN connector.



Retractable cable lg. 450 mm, up to 2,4 m.

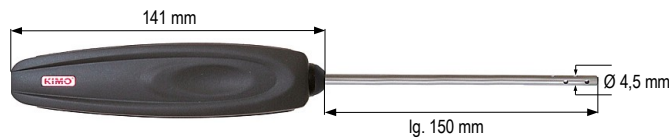

■ **Penetration** **Measuring range** **t₆₃** **Ref.**

NTC (IEC 751 guideline).
Stainless steel sheath with pointer tip.
ABS handle (from -40 to +85°C).

from -40 to +120°C

10
sec.



SNP 150



Secured mini-DIN connector.



Retractable cable lg. 450 mm, up to 2,4 m.

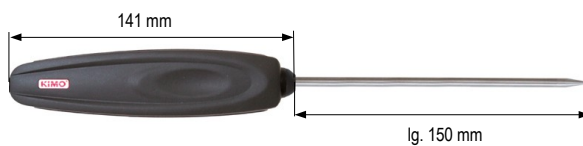

■ **General use** **Measuring range** **t₆₃** **Ref.**

NTC (IEC 751 guideline).
Stainless steel sheath.
ABS handle (from -40 to +85°C).

from -40 to +120°C

12
sec.


SNG 150 A









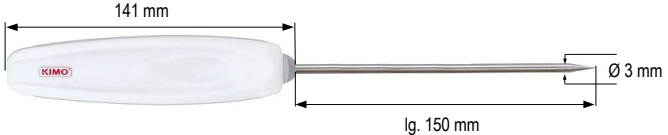

Secured mini-DIN connector.

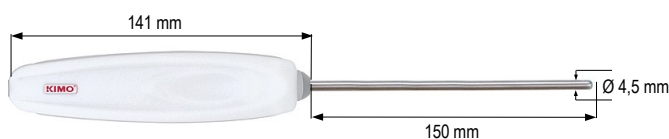


PVC Cable 1 m

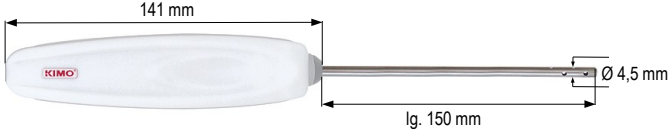

| ■ Ambient | Measuring range | t_{63} | Ref. |
|--|---------------------------|--------------------|------------------|
| <p>NTC (IEC 751 guideline). Stainless steel sheath with ambient end. ABS handle (from -40 to +85°C).</p>  <p>Secured mini-DIN connector.</p>  <p>PVC Cable 1 m</p>  <p>141 mm lg. 150 mm Ø 4,5 mm</p>  <p>10 mm</p> | <p>from -40 to +120°C</p> | <p>10 sec.</p> | <p>SNA 150 A</p> |

| ■ Penetration | Measuring range | t_{63} | Ref. |
|--|---------------------------|--------------------|------------------|
| <p>NTC (IEC 751 guideline). Stainless steel sheath with pointer tip. ABS handle (from -40 to +85°C).</p>  <p>Secured mini-DIN connector.</p>  <p>PVC Cable 1 m</p>  <p>141 mm lg. 150 mm Ø 3 mm</p>  <p>15 mm</p> | <p>from -40 to +120°C</p> | <p>10 sec.</p> | <p>SNP 150 A</p> |

■ Extension

| ■ General use | | Ref. |
|--|--|------------|
| <p>Telescopic extension.</p>  <p>Length 1 m.</p> | | <p>RTS</p> |

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr

RoMiotto
Instrumentos de Medição

**RoMiotto Instrumentos
de Medição Ltda**

Rua São Leonardo, 187 - Freguesia do Ó - São Paulo - SP
Cep: 02803-000 | Fone.: (11) 3976-4003 - Fone.: (11) 3999-7737
www.romiotto.com.br | E-mail: info@romiotto.com.br